

Specifications:


Current rating:3.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:1000M ohm.Min
 Withstanding voltage:500V AC/minute
 Operating temperature range:-25°C~+85°C
 Material:

Insulator:Nylon 66 (UL94V-0)
 Default Color:White
 Contact:Brass
 Plated:Tin Plated
 How To Order:
 WF3DVK20-XX

_____ No. of Contacts
 _____ VK: Straight Lock Type

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	12.00	8.00	28	30.00	26.00
12	14.00	10.00	30	32.00	28.00
14	16.00	12.00	32	34.00	30.00
16	18.00	14.00	34	36.00	32.00
18	20.00	16.00	36	38.00	34.00
20	22.00	18.00	38	40.00	36.00
22	24.00	20.00	40	42.00	39.00
24	26.00	22.00			
26	28.00	24.00			

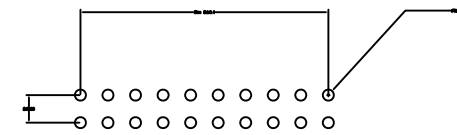

P.C.B LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.0mm Wafer Double Row Straight With Lock Type	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	PART NO: WF3DVK20-XX		
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1			
A	04-Jun-2020	(H0072)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					