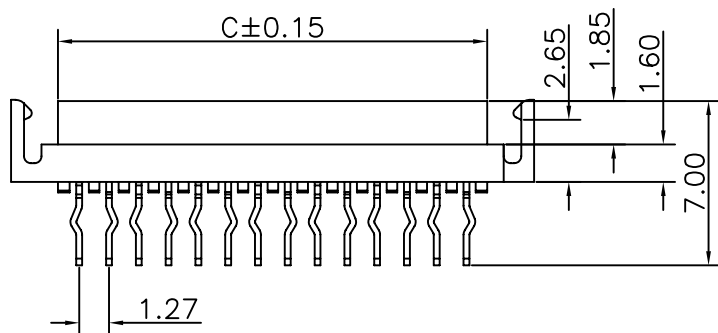
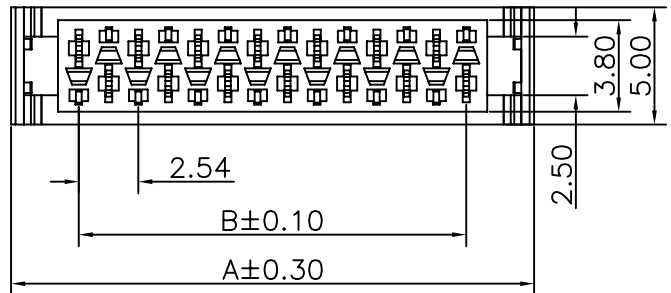


Pos	A	B	C	Pos	A	B	C
4	9.70	3.81	5.60	16	24.94	19.05	20.84
6	12.24	6.35	8.14	18	27.48	21.59	23.38
8	14.78	8.89	10.68	20	30.02	24.13	25.92
10	17.32	11.43	13.22	22	32.56	26.67	28.46
12	19.86	13.97	15.76	24	35.10	29.21	31.00
14	22.40	16.51	18.30	26	37.64	31.75	33.54

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m Ohm. Max.

Insulation Resistance:1000M Ohm. Min.

Withstanding Voltage:AC 500V AC/Minute

Operating Temperature Range:-40°C ~ +105°C

Material And Finish

Insulator:High Temp. Plastic(Nylon 46 UL94V-0)


Insulator Color:Red

Contact Material:Copper Alloy


Finish:Tin Plated

How To Order

WFAV254-XX-LK

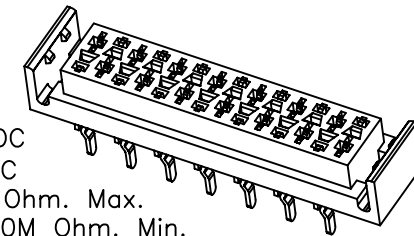

LK:With Lock
No.Of Positions
SMD Type

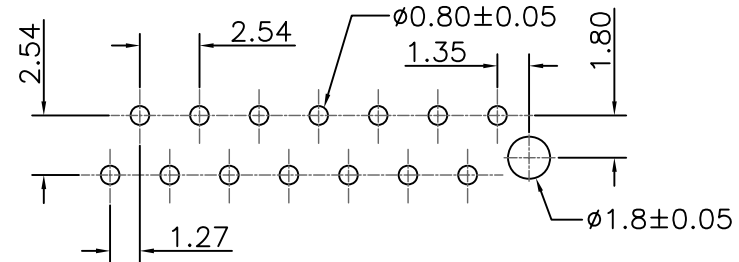

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 HOYATO Connector supplies 东莞好亚通电子厂	
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm PCB Connector Striaht Dip Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: WFAV254-XX-LK	
A	12-Aug-2010	(PC0001)	Ken				
REV	DATE	FILE	BY		PROJECTION: 