

Dimension:

Contacts	A	B
10	5.00	12.50
20	11.25	18.75
30	17.50	25.00
40	23.75	31.25


Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resisitance:20m ohm. Max.
 Insulation Resisitance:100M ohm. Min.
 Withstanding Voltage:250V AC/minute
 Operating Temperature Range :-40°C~+85°C
 Material and Finish
 Insulator:High Temp. Plastic (Nylon 6T UL94V-0)
 Insulator Color:Beige
 Contact:Brass Gold Plated
 Metal Tab:Brass Tin Plated

How To Order:

WFBSM125-XX-XX-CR

- CR:Cap and Tape&Reel
- Blank with Post
- 01:Without Post
- Number of Contacts
- BSM:Double Rows SMD Type

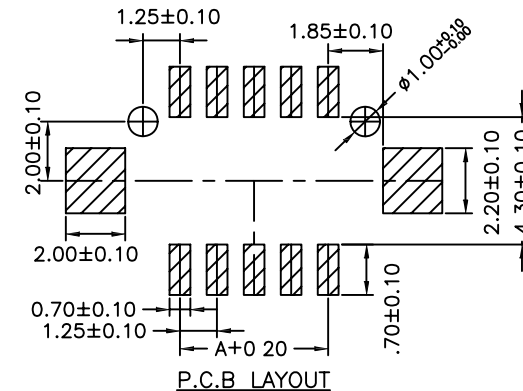

RoHS Compliant

F				DRAWN:	
E				Ken	
D				CHECKED:	
C				Lily Chou	
B				APPROVAL:	
A	01-SEP-2016	(PC0001)	Ken	Chao Peng	
REV	DATE	FILE	BY		

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT: MM	
SCALE: 1:1	
SHEET: 1 / 1	
PROJECTION:	

DESCRIPTION:	1.25mm Wafer Double Row SMT Type
PART NO:	WFBSM125-XX-XX-CR

SIZE	A4
------	-----------