
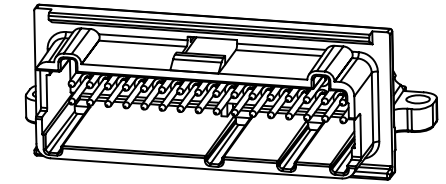

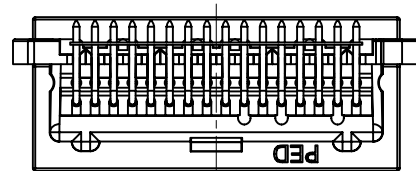


TYPE 102  
CONN\_ASM:12129369

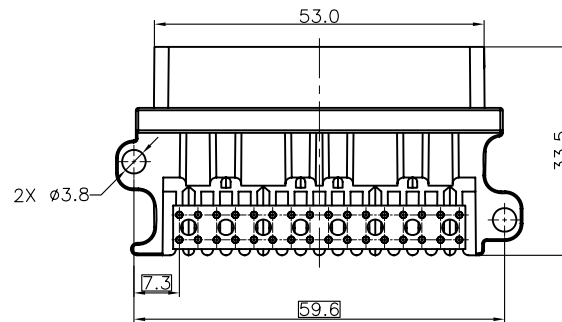

Specifications:

Current Rating:9.0A AC/DC  
Voltage Rating:600V AC/DC  
Contact Resistance:10m ohm. Max.  
Insulation Resistance:1000M ohm. Min.  
Withstanding Voltage:1500V AC For One Minute  
Operating Temperature Range:-40°C To +105°C  
Materials:

Insulator:PBT(UL94V-0)

Insulator Color:Yellow


Contact:Brass

Plating:Matte Tin Plated

How To Order:

WFDR42-32MT-LK

- With Lock
- Matte Tin Plated
- No. of Contacts
- DR:Double Row R/A Type

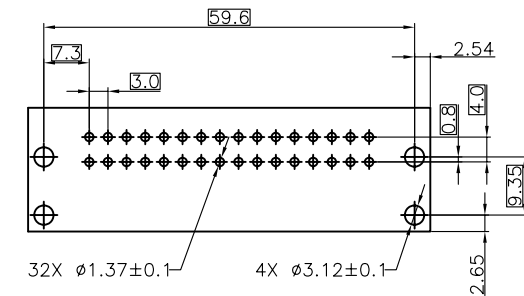

MATING CIRCUIT BOARD DETAIL  
CONNECTOR MATING SIDE

NOTES

1. RECOMMENDED BOARD THICKNESS IS 1.5MM.
2. SOLDER-THRU HOLE RECOMMENDED.
3. RECOMMENDED FASTENER #4-40.

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 4.0*3.0mm Wafer R/A Type	SIZE <b>A4</b>
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 2	PART NO:	WFDR42-32MT-LK		
A	11-Apr-2017	(H0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					