

Specifications:



Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-40°C To +105°C

Materials:

Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated

How To Order

WFDRR42-08-PG-01-P42-BK

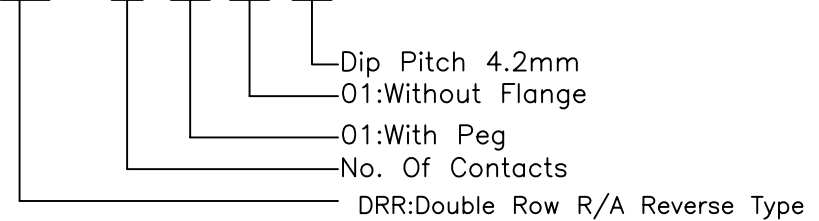

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE		
E				Ken	.X=±0.20				4.2mm Wafer R/A Type	A4
D				CHECKED:	.XX=±0.15					
C				Lily Chou	UNIT: MM					
B				APPROVAL:	SCALE: 1:1	PART NO:				
A	22-May-2021	(H0030)	Ken	Chao Peng	SHEET: 1 / 2		WFDRR42-08-PG-01-P42-BK			
REV	DATE	FILE	BY		PROJECTION:					