




1

2

3

4

5

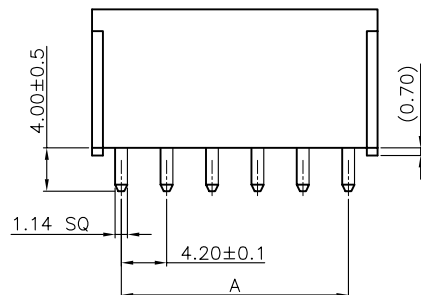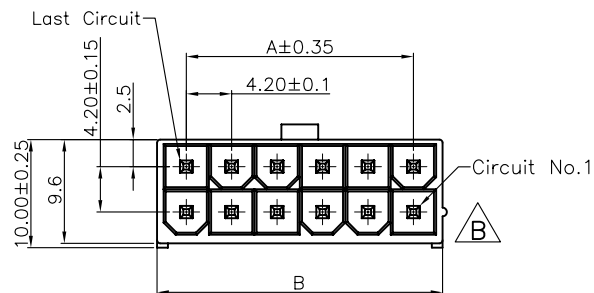

Dimension Information:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	4.2	5.4	14	25.2	30.6
4	4.2	9.6	16	29.6	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

Specifications:

Current Rating:9.0A AC/DC

Voltage Rating:600V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:600V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Materials:

Insulator:High Temp. Plastic(Nylon66 UL94V-2)

Insulator Color:Transparent White

Contact:Brass


Plating:Tin Plated

How To Order

WFDV42-XX-V2

No. Of Contacts

DV:Double Row Straight Type



RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 4.2mm Wafer Straight Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 1 / 2	PART NO: WFDV42-XX-V2	
A	22-May-2014	(H0030)	Ken		PROJECTION: 		
REV	DATE	FILE	BY				