


Specifications:


Current Rating:1.0A AC/DC
 Voltage Rating:50V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:100M ohm. min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-25°C ~ +85°C
 Material And Finish
 Insulator:High Temp. Plastic (Nylon46 UL94V-0)
 Insulator Color:Natural(White)
 Material:Brass
 Plating:Gold Plated/Tin Plated
 How To Order
 WFDVSM10-XXX-XX



Blank
 01:Without Post
 Blank Gold Plated
 T:Tin Plated
 No. Of Positions
 Straight SMD Type

Dimension

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
12	5.00	8.30	20	9.00	12.30
14	6.00	9.30	30	14.00	17.30
16	7.00	10.30	40	19.00	22.30
18	8.00	11.30	50	24.00	27.30

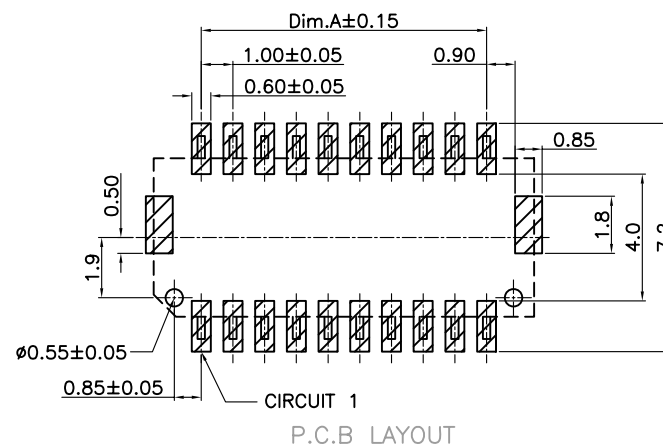

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.0mm Wafer Double Straight SMT Type	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	WFDVSM10-XX-XX-TR	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					