

Specifications:


Current Rating:7.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:10m Ohm.Max.  
 Insulation Resistance:1,000m Ohm.Min.  
 Withstanding Voltage:1,500V AC/Minute  
 Operating Temperature Range:-40°C To +105°C  
 Material and Finish:

Insulator:Nylon 66 (UL94V-0)  
 Insulator Color:White  
 Contact:Copper Alloy  
 Plated:Tin Plated  
 How To Order  
 WFR396-XX

No. Of Positions  
 R:R/A Type

Dimension:

Pos.	Dimension:		Pos.	Dimension:		Pos.	Dimension:	
	A	B		A	B		A	B
02	3.96	7.86	09	31.68	35.58	16	59.40	63.30
03	7.92	11.82	10	35.64	39.54	17	63.36	67.26
04	11.88	15.78	11	39.60	43.50	18	67.32	71.22
05	15.84	19.74	12	43.56	47.46	19	71.28	75.18
06	19.80	23.70	13	47.52	51.42	20	75.24	79.14
07	23.76	27.66	14	51.48	55.38			
08	27.72	31.62	15	55.44	59.34			

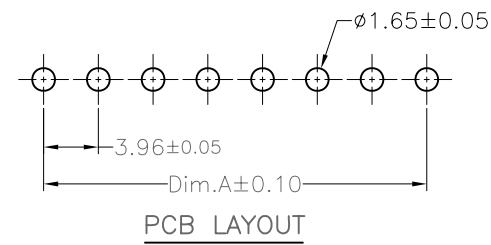

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	3.96mm Wafer R/A Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	WFR396-XX	
A	22-May-2014	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					