


6P-8P

KEY A

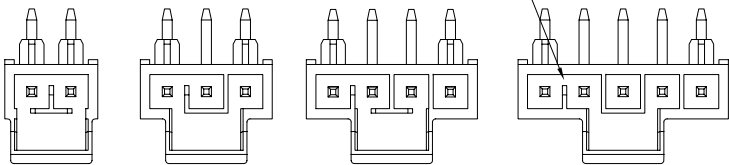





2P
Black

3P
Black

4P
Black

5P
Black

KEY B



2P
WHITE

3P
WHITE


4P
WHITE

5P
WHITE


Specifications:
 Current Rating:6.5A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1500V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material And Finish:
 Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated

How To Order

WFRA25-XXX-X-LK-XX

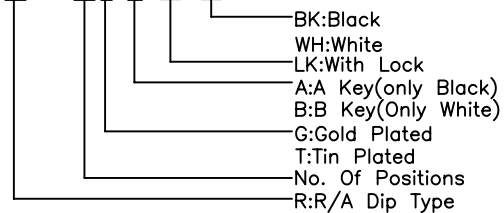

Circuits	Dimension	
	A	B
2	5.95	2.5
3	8.45	5.0
4	10.95	7.5
5	13.45	10.0
06	15.95	12.50
07	18.45	15.00
08	20.95	17.50



PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:
E				Ken	.X=±0.20
D				CHECKED:	.XX=±0.15
C				Lily Chou	UNIT: MM
B				APPROVAL:	SCALE: 1:1
A	05-Mar-2018	(PC0001)	Ken	Chao Peng	SHEET: 1 / 1
REV	DATE	FILE	BY		PROJECTION:

DESCRIPTION:	2.5mm Wafer Single Row Dip With Lock Type
PART NO:	WFRA25-XXX-X-LK-XX



SIZE

A4