

Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Dim. C
2	3.500	8.00	
3	7.00	11.50	
4	10.50	15.00	7.00
5	14.00	18.50	10.50
6	17.50	22.00	14.00
7	21.00	25.50	17.50
8	24.50	29.00	21.00
12	38.00	43.00	35.00

Specifications:

Current rating:14Amps  
 Voltage rating:400V AC,DC  
 Contact resistance:18mohm Max  
 Insulation resistance:1,000Mohm min.  
 Withstanding voltage:1,500V AC;DC  
 Operating Temperature range:-40°C ~ +105°C  
 Materials:

Insulator:High Temp.Plastic(LCP UL94V-0)





Color:Black

Contact:Copper Alloy

Plating:Tin Plated

How to order

WFRA35-XXT-X

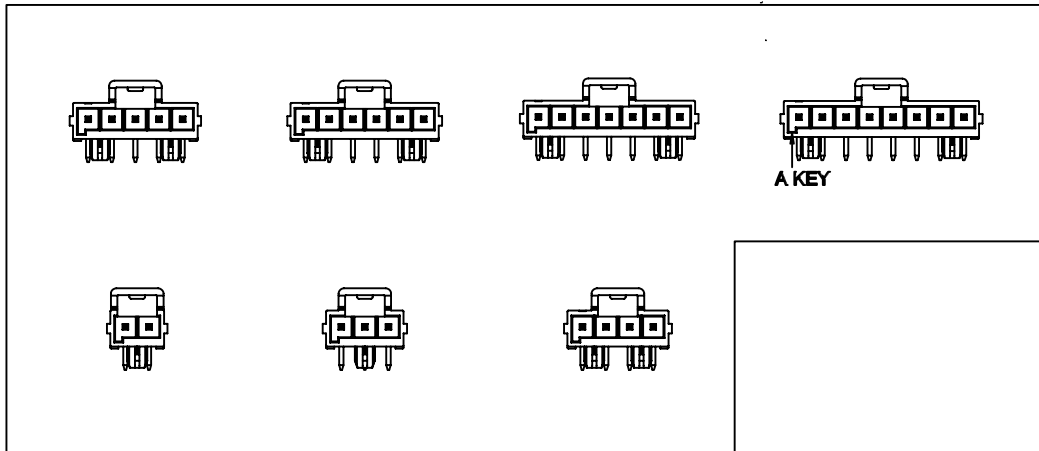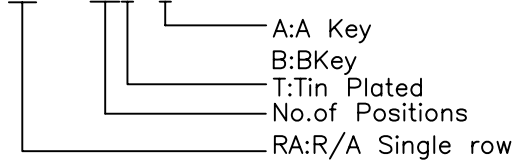

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	3.0mm Wafer Single Row R/A Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 2	PART NO:	A4	
A	01-SEP-2018	(PC0001)	Ken	Chao Peng	PROJECTION:			WFRA35-XXT-X
REV	DATE	FILE	BY					