


Specifications:

Current rating:1.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:100M ohm.Min
 Withstanding voltage:250V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:
 Insulator:High Temp. Plastic(Nylon 46 94V-0)
 Insulator Color:White
 Contact:Brass
 Plated:Tin Plated
 Package:1500pcs/Reel
 How To Order:
 WFRSM125-XX-TR

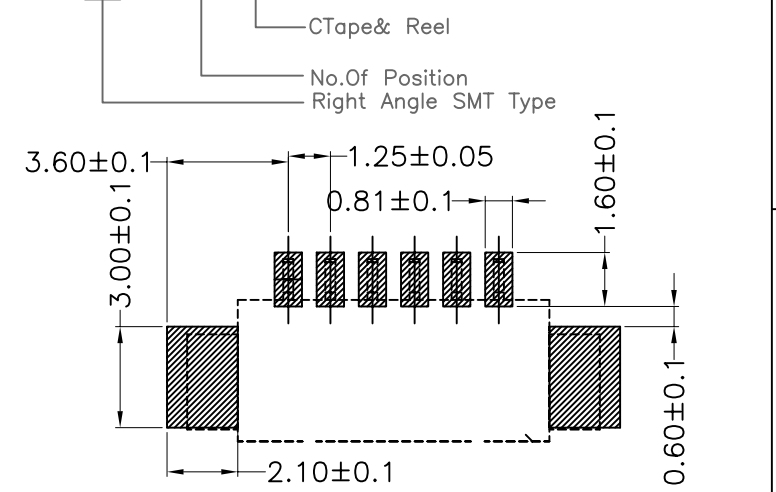

Dimension:

Pos	DimA	DimB	DimC	DimD	Pos	DimA	DimB	DimC	DimD
2	1.25	7.25	4.25	4.00	9	10.00	16.00	13.00	6.00
3	2.50	8.50	5.50		10	11.25	17.25	14.25	
4	3.75	9.75	6.75		11	12.50	18.50	15.50	
5	5.00	11.00	8.00		12	13.75	19.75	16.75	
6	6.25	12.25	9.25	6.00	13	15.00	21.00	18.00	
7	7.50	13.50	10.50		14	16.25	22.25	19.25	
8	8.75	14.75	11.75		15	17.50	23.50	20.50	

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.25mm Wafer R/A SMT Type	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFRSM125-XX-TR		
C					PROJECTION:			
B								
A	01-SEP-2009	(PC0001)	Ken					
REV	DATE	FILE	BY					