


DIMENSION INFORMATION:

NUMBER OF CIRCUITS	DIM A	DIM B	DIM D
04	8.86 Δ	3.81	6.40 OR 4.10
06	11.40	6.35	
08	13.94	8.89	
10	16.48	11.43	
12	19.02	13.97	
14	21.56	16.51	
16	24.10	19.05	
18	26.64	21.59	
20	29.18	24.13	
22	31.72	26.67	
24	34.26	29.21	
26	36.80	31.75	


Specifications:
 Current Rating:1.2A AC/DC
 Voltage Rating:32V AC/DC
 Contact Resistance:15m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 Materials:

Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:White
 Contact:Copper Alloy
 Plating:Tin Plated
 How To Order

WFSM127-XXT-X-SP-WH-CR



- Cap+Tape&Reel
- White
- Short Post
- Blank:6.40
- S:4.10
- Tin Plated
- No.of Positions
- SMT Type

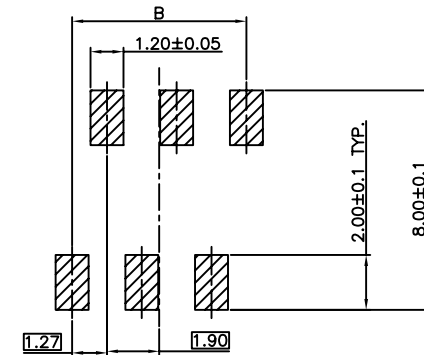

RECOMMENDED P.C.B LAYOUT WITH PCB PEGS
 FROM COMPONENT SIDE PCB THICKNESS (1.60±0.14)

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.27mm Wafer Straight SMT Type	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: WFSM127-XXT-X-SP-WH-CR		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	17-Oct-2019	(H0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					