


Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:100M ohm.Min
 Withstanding voltage:250V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:
 Insulator:High Temp. Plastic(Nylon 46 UL94V-0)
 Insulator Color:White
 Contact:Phosphor Bronze
 Plated:Tin Plated

How To Order:
 WFVSM125-XX
 No.Of Position
 Straight SMT Type

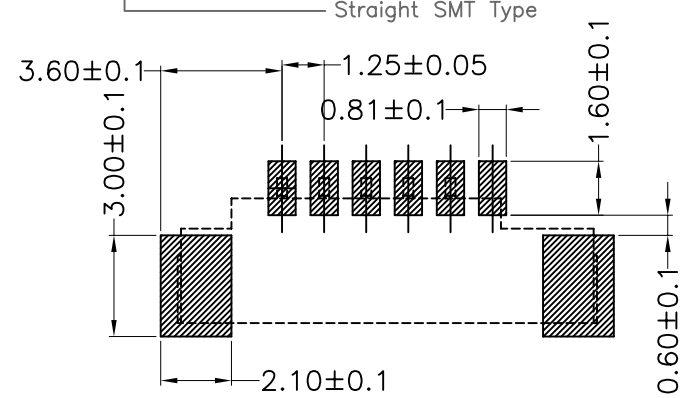

Dimension:

Pos	DimA	DimB	DimC	Pos	DimA	DimB	DimC
2	1.25	7.25	4.25	9	10.00	16.00	13.00
3	2.50	8.50	5.50	10	11.25	17.25	14.25
4	3.75	9.75	6.75	11	12.50	18.50	15.50
5	5.00	11.00	8.00	12	13.75	19.75	16.75
6	6.25	12.25	9.25	13	15.00	21.00	18.00
7	7.50	13.50	10.50	14	16.25	22.25	19.25
8	8.75	14.75	11.75	15	17.50	23.50	20.50

PCB LAYOUT

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.25mm Wafer Straight SMT Type	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: WFVSM125-XX		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	01-SEP-2009	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					