



剖面图 A-A

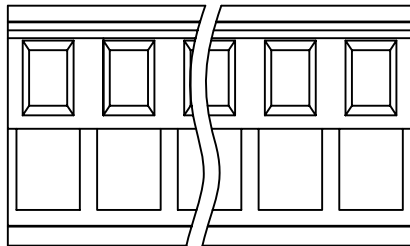

Specifications:

Current Rating:15.0A AC/DC
 Voltage Rating:300V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:500M ohm Min.
 Withstanding Voltage:2.000V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Wire Range:24~12 AWG (2.5mm²)
 Material and Finish
 Insulator:High Temp. Plastic(Nylon66 UL94V-0)
 Contact Material:Brass With Tin Plated
 Terminal Screw:Steel Yellow Chromated Zinc
 Wire Cage:Brass Nickel Plated
 How To Order
 TBR508-XX-M3

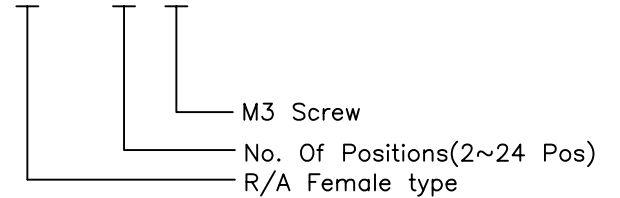

A
B

D

E				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 5.08mm Terminal Block R/A Female Type	SIZE A4
D				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1			
C				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: TBR508-XX-M3		
B					PROJECTION:			
A	14-Jul-2019	(H0001)	WGL					
REV	DATE	FILE	BY					