


Specifications:  
 Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:30m ohm. Max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:500V AC/Minute  
 Operating Temperature Range : -25° ~ +125°  
 Material:

Insulator:High Temp. Plastic (Nylon 46 UL94V-0)  
 Insulator Color:Black  
 Contact:Phosphor Bronze  
 Finish:Gold Plated  
 How To Order  
 BTSM25-XXG-300

— Contact Height  
 — G:Gold Plated  
 — NO Of Contacts  
 — SMD Type

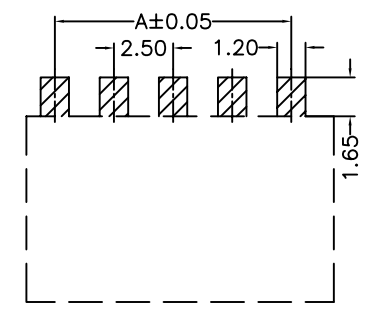

PCB LAYOUT

Pin No.	A	B
02P	2.50	4.90
03P	5.00	7.40
04P	7.50	9.90
05P	10.00	12.40

E				DRAWN: Ken Wang
D				CHECKED: Lily Chou
C				APPROVAL: Chao Peng
B				
A	14-Jul-2014	(H0032)	Ken Wang	
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: MM
SCALE:2:1
SHEET: 1 / 1
PROJECTION:

<b>HOYATO</b> 东莞好亚通电子厂	
DESCRIPTION: 2.5mm Battery Connector 3.0mm Height	SIZE
PART NO: BTSM25-XXG-300	<b>A4</b>

A  
B  
C  
D