



1

2

3

4

5



Electric Specifications

Current Rating:3.0Amps

Rating Voltage: 250V AC

Insulation Resistance:100M Ohm Min At DC 500V

Contact Resistance:30m Ohm Max At DC 100m Amps

Withstanding Voltage:1 Minute At 750V r.m.s Min

Temperature Range:-40°C~85°C

Materials:

Insulator:LCP UL94V-0

Insulator Color:Balck

Terminal :Phosnic Bronze

Plating:Selective Gold Plated

How To Order







PCIRSM127-40SG-LK

With Lock

Selective Gold Plated

No.of Positions

R/A SMT Type

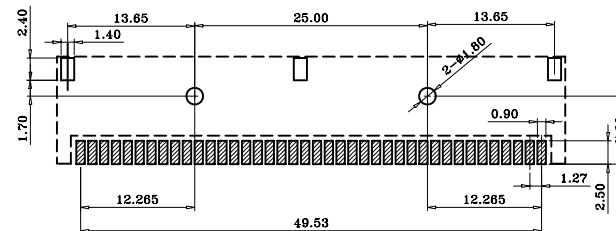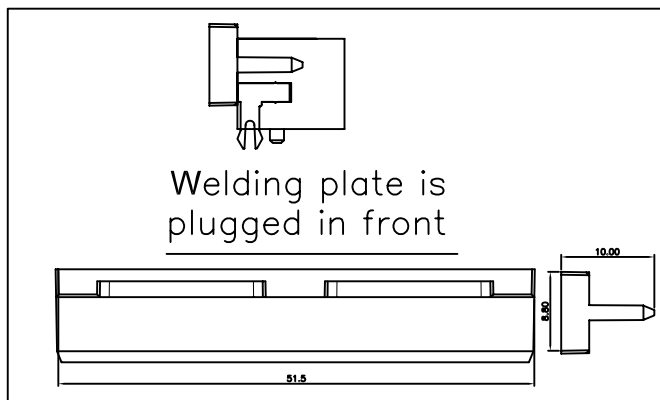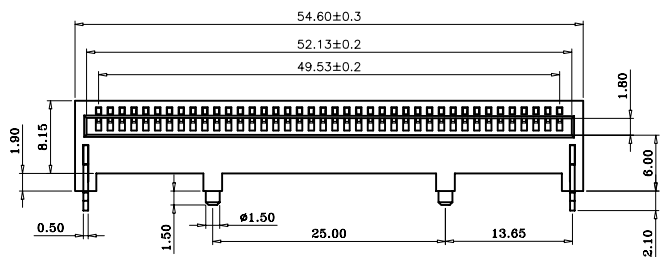

RECOMMEND P.C.B. LAYOUT (COMPONENT SIDE)
DEFAULT TOLERANCES:±0.05; PCB THICKNESS: 1.6MM
TOP VIEW

RoHS Compliant

REV	DATE	FILE	BY
A	18-Nov-2017	(PC0001)	WGL
B	25-Dec-2017	9.7 to 10.15mm	WGL
C	25-Dec-2017	Add Plugged	WGL
D			
E			

DRAWN:	WGL
CHECKED:	Jeremy Liu
APPROVAL:	Mike Wu

GENERAL TOLERANCE:	.X=±0.2 .XX=±0.15
UNIT:	MM
SCALE:	2:1
SHEET:	1 / 1
PROJECTION:	

DESCRIPTION:	PCB Card Edge R/A SMT Type
PART NO:	PCIRSM127-40SG-LK

SIZE	A4
------	-----------