

1

2

3

4

5

A

B

C

D

Electric Specifications

Current Rating:3.0Amps

Rating Voltage: 250V AC

Insulation Resistance:100M Ohm Min At DC 500V

Contact Resistance:30m Ohm Max At DC 100m Amps

Withstanding Voltage:1 Minute At 750V r.m.s Min

Temperature Range:-40°C~85°C

Materials:

Insulator:PBT UL94V-0








Insulator Color:Black

Terminal :Brass

Plating:Selective Gold Plated

How To Order

PCIVSM127-40-LK

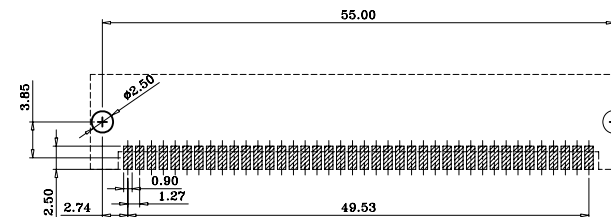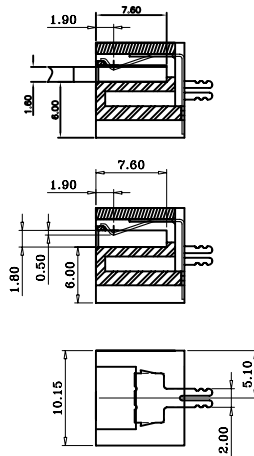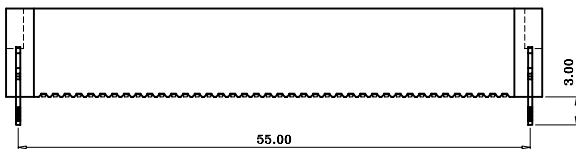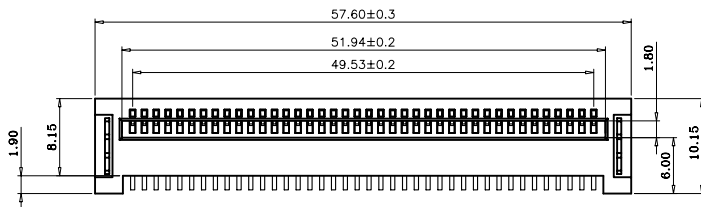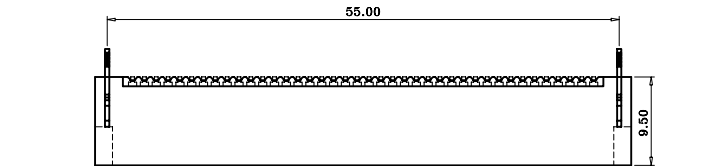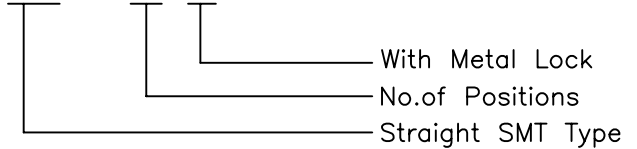

RECOMMEND P.C.B. LAYOUT (COMPONENT SIDE)
DEFAULT TOLERANCES: ±0.05; PCB THICKNESS: 1.6MM
TOP VIEW

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:			
				CHECKED:	UNIT: MM			DESCRIPTION:
B	14-May-2018	Amend Metal Tab	HJL	APPROVAL:	SCALE:2:1	PCB Card Edge 40P Straight SMT Type	A4	
A	26-Apr-2018	(H0001)	HJL		SHEET: 1 / 1	PART NO:		
REV	DATE	FILE	BY		PROJECTION:	PCIVSM127-40-Lk		

