




1

2

3

4

5

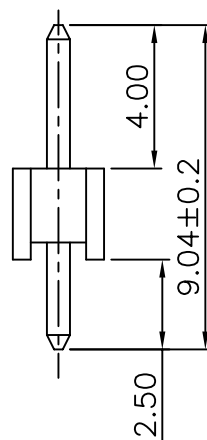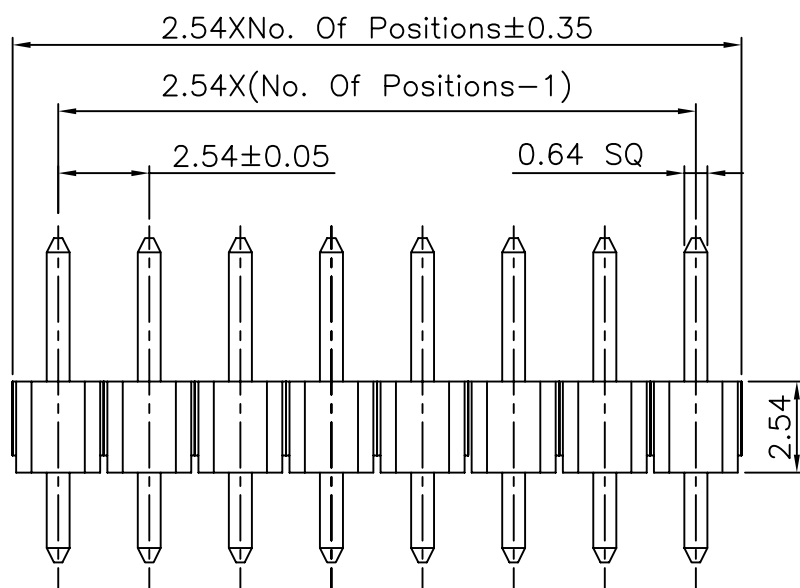

### Specifications

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1,000M ohm. Min.

Withstanding Voltage:600V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Material and Plated

Insulator:High Temp. Plastic(PBT UL94V-0)

Insulator Color:Black


Contact:Copper Alloy

Plated:Gold Plated

How To Order



PHV254-XXX-900

Pin Length  
G:Gold Plated  
T:Tin Plated  
No. Of Positions  
V:Straight Type

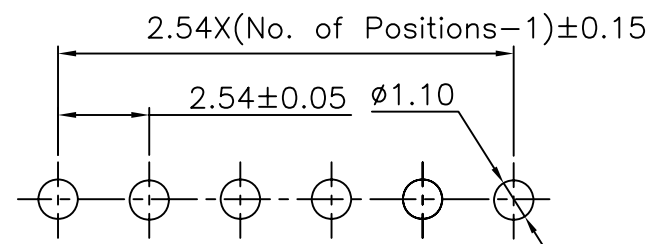

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Single Row Straight Type	SIZE  <b>A4</b>
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: PHV254-XXX-900	
A	25-Apr-2017	(PC0001)	Ken		PROJECTION: 		
REV	DATE	FILE	BY				