
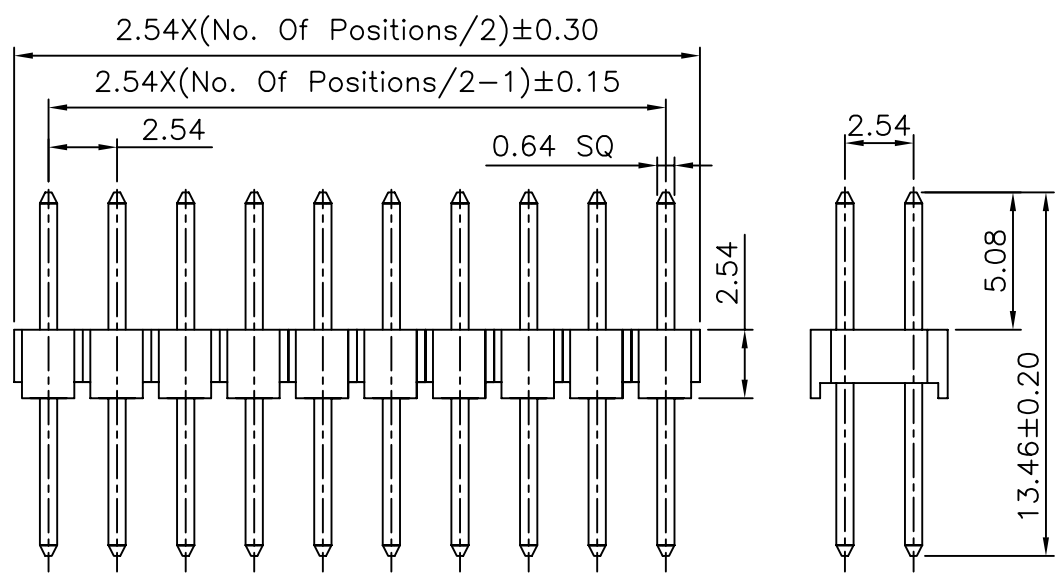


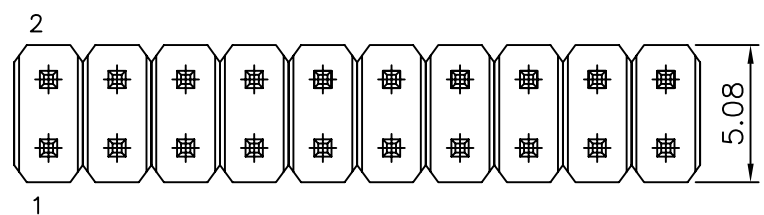

Specifications:

Current rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm Max

Insulation Resistance:1000M ohm Min

Withstanding Voltage:600V AC For one Minute

Operating Temperature Range:-40°C To +105°C

Materials and Finish

Insulator:PBT(UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Plating:Gold Plated,Tin Plated

How To Order

PHVD254-XXX-1346


Pin Lenght

G:Gold Plated


T:Tin Plated

No.Of Positions

Straight Type

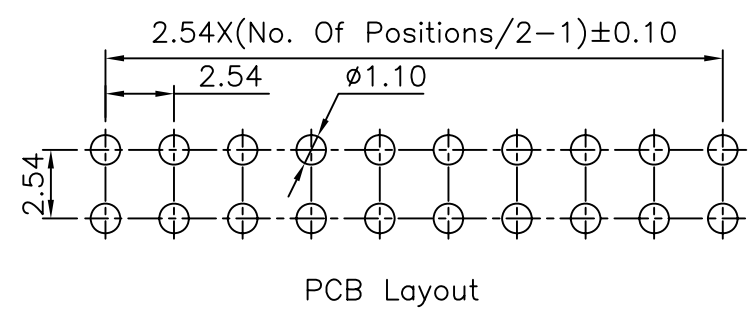

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15				
E									
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm Pin Header Double Row Straight Type	SIZE		
C					SCALE: 1:1				
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: PHVD254-XXX-1346	A4		
A	02-Mar-2018	(PC0001)	Ken		PROJECTION: 				
REV	DATE	FILE	BY						