
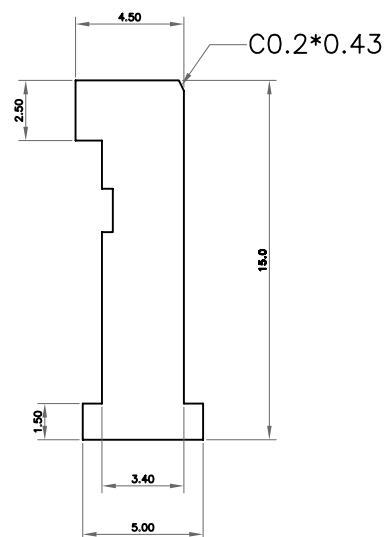
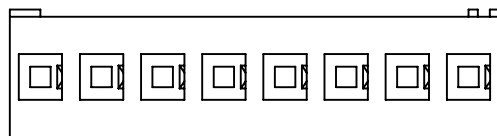
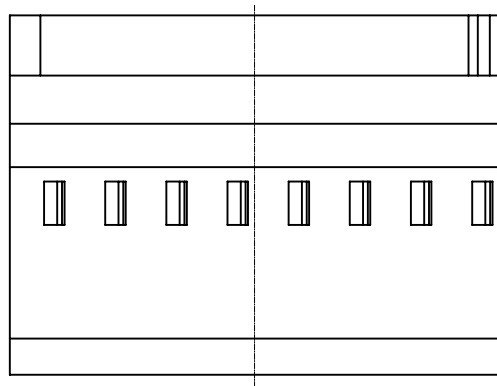


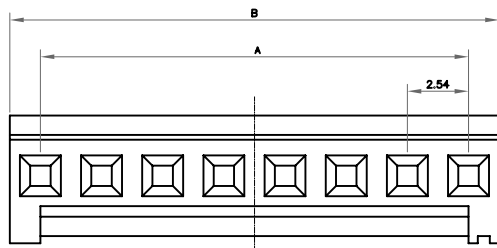

Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:15m ohm. max.

Insulation Resistance:1000M ohm. Min.

Withstanding voltage:600V AC For One Minute

Operating Temperature Range:-25°C to +105°C

Material and Finish

Insulator:PBT UL94V-0

Color:Black

Accepts H2DT254T Terminal

How To Order

H1A254-XX-XX

BU:Blue
No. of Positions
A:Single Rows

PART NO.	DIM A	DIM B
H1A254-02	2.54±0.20	5.08±0.25
H1A254-03	5.08±0.20	7.62±0.25
H1A254-04	7.62±0.20	10.16±0.25
H1A254-05	10.16±0.25	12.70±0.25
H1A254-06	12.70±0.20	15.24±0.30
H1A254-07	15.24±0.25	17.78±0.30
H1A254-08	17.78±0.25	20.32±0.30
H1A254-09	20.32±0.25	22.86±0.30
H1A254-10	22.86±0.25	25.40±0.30

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm Single Row Crimping Housing	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: H1A254-XX-XX	
A	12-Mar-2014	(QC01)	Ken		PROJECTION: 		
REV	DATE	FILE	BY				