
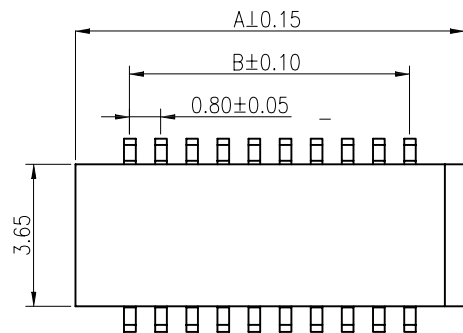
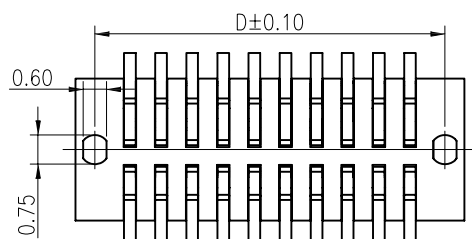
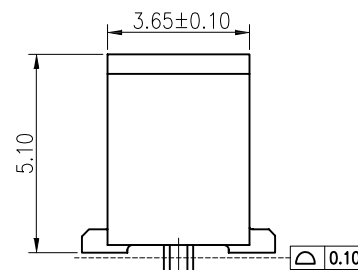


MATING HEIGHT
SCALE:1.25:1

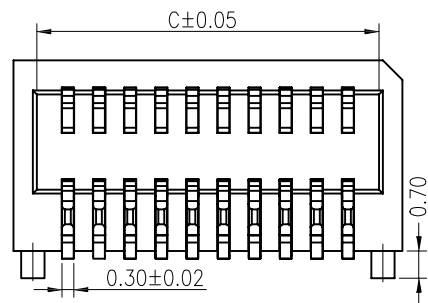

NO. of contacts	Dimensions				NO. of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	3.60	0.80	2.40	2.60	30	14.00	11.20	12.80	13.00
6	4.40	1.60	3.20	3.40	32	14.80	12.00	13.60	13.80
8	5.20	2.40	4.00	4.20	34	15.60	12.80	14.40	14.60
10	6.00	3.20	4.80	5.00	36	16.40	13.60	15.20	15.40
12	6.80	4.00	5.60	5.80	38	17.20	14.40	16.00	16.20
14	7.60	4.80	6.40	6.60	40	18.00	15.20	16.80	17.00
16	8.40	5.60	7.20	7.40	42	18.80	16.00	17.60	17.80
18	9.20	6.40	8.00	8.20	44	19.60	16.80	18.40	18.60
20	10.00	7.20	8.80	9.00	46	20.40	17.60	19.20	19.40
22	10.80	8.00	9.60	9.80	48	21.20	18.40	20.00	20.20
24	11.60	8.80	10.40	10.60	50	22.00	19.20	20.80	21.00
26	12.40	9.60	11.20	11.40	52	22.80	20.00	21.60	21.80
28	13.20	10.40	12.00	12.20					

Specifications

Current Rating:0.5A AC/DC
Voltage Rating:100V AC/DC
Contact Resistance:40m ohm. Max
Insulation Resistance:100Mohm min
Withstanding Voltage:500V(r.m.s) For one Minute
Operating Temperature Range:-40°C to 105°C
Material and Finish

Insulator:High Temp. Plastic(Nylon 9T UL94V-0)
Color:Beige


Conact :Copper Alloy

Plated:Gold Plated


Package :1000pcs/Reel

How To Order:

BBPR08-XXG-510A-XX-TR




Tape&Reel
Blank With Post
PN:Without Post
Height 5.1mm
Gold Plated
No. of Contacts

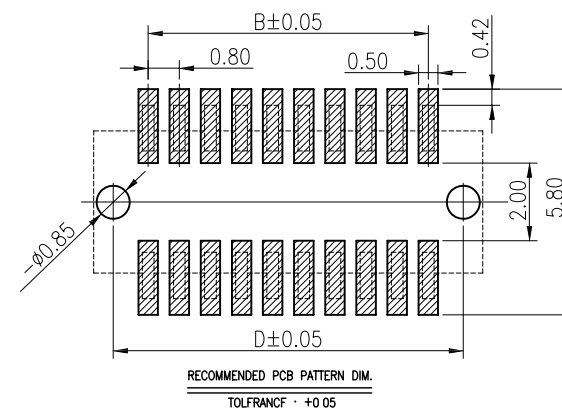


F				DRAWN:	Ken	GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15		DESCRIPTION: 0.8mm Board To Board Plug 5.1mm Height SMT Type	SIZE A4
E				CHECKED:	Lily Chou	UNIT: MM				
D						SCALE: 1:1				
C				APPROVAL:	Chao Peng	SHEET: 1 / 1	PART NO:			
B						PROJECTION:			BBPR08-XXG-510A-XX-TR	
A	29-Jan-2017	(PC0001)	Ken							
REV	DATE	FILE	BY							

Tape width 16 and 24 mm


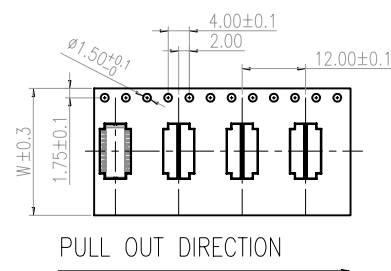


Tape width 32 and 44 mm

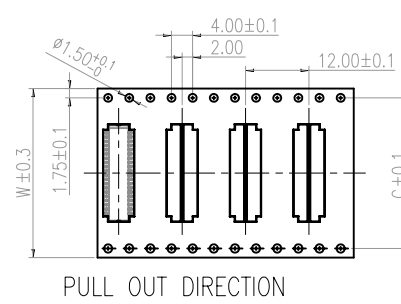

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness: 0.3 ± 0.05 mm.
- 5.All dimensions meet EIA-481-B requirements.
- 6.5000pcs Pef Reel.
- 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

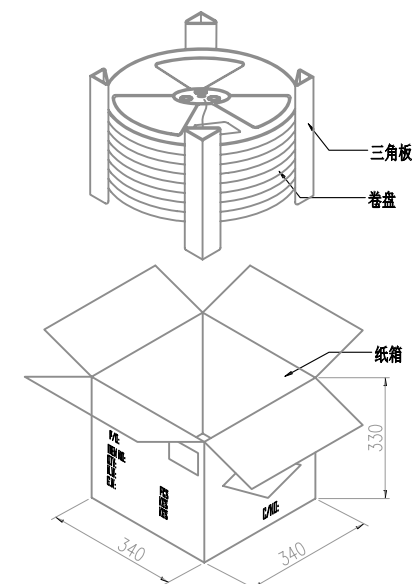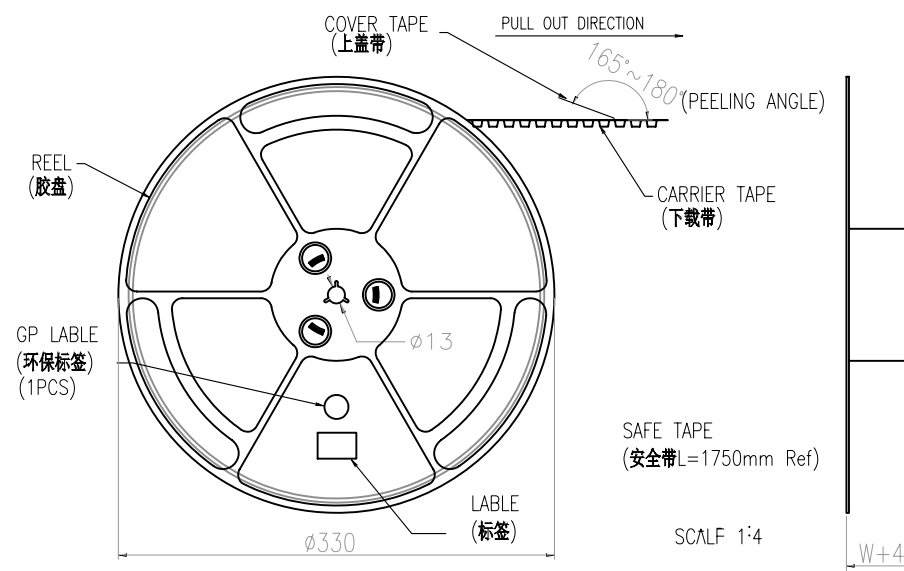

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~20PIN	16	—	1000	12	12000
21PIN~40PIN	24	—	1000	10	10000
41Pin~50PIN	32	28.4	1000	8	8000
51Pin~60PIN	44	40.4	1000	6	6000

A

B

C

D

F				DRAWN:	Ken	GENERAL TOLERANCE:	 HOYATO Connector supplies		
E				CHECKED:	Lily Chou	.X=±0.20 .XX=±0.15			
D				APPROVAL:	Chao Peng	UNIT: MM			
C						SCALE: 1:1			
B						SHEET: 1 / 1			
A	29-Jan-2017	(PC0001)	Ken				DESCRIPTION:	0.8mm Board To Board Plug 5.1mm Height SMT Type	SIZE
REV	DATE	FILE	BY			PROJECTION:	PART NO:	TPK-BBPR08-XXG-510A-TR	A4