

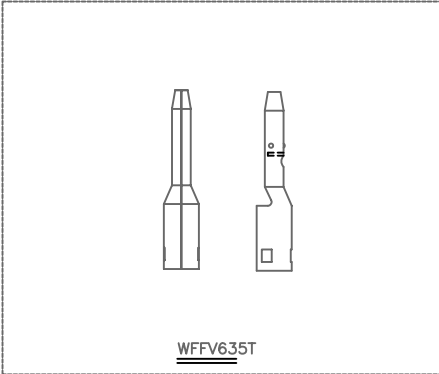
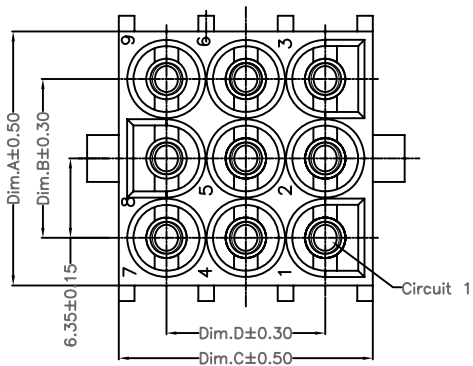


Circuits	Dim.A±0.25	Dim.B±0.15	Dim.C±0.25	Dim.D±0.15	Dim.E±0.25
2	7.62	—	13.97	6.35	4.30
3	7.62	—	20.32	12.70	4.30
4	7.62	—	26.67	19.05	4.30
5	7.62	—	33.02	25.40	4.30
6	20.32	12.70	13.97	6.35	4.30
7	7.62	—	45.72	38.10	4.30
8	7.62	—	52.07	44.45	4.30
9	20.32	12.70	20.32	12.70	4.30
10	7.62	—	64.77	57.15	4.30
12	20.32	12.70	26.67	19.05	4.30
15	20.32	12.70	33.02	25.40	4.30

Specifications:
Current Rating:13.0 Amps
Voltage Rating:600V AC/DC
Contact Resistance:20m Ohm Max
Insulator Resistance:1000M Ohm Min
Withstanding Voltage: 5000V AC/Minute
Operating Temperature Range:−55°C To +105°C
Materials and Finish:
Insulator:Nylon 66 (UL94V−0)
Contact:Phosphor Bronze
Plating:Tin Plated




How To Order
WFSV635−XX−V0
└── V0 Type
└── No.of Positions
└── V: Straight

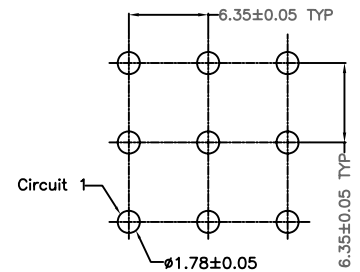

P.C.B. Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 6.35mm Power Socket Wafer Straight Type	SIZE A4
E								
D								
C				CHECKED: Lily Chou	UNIT: MM			
B					SCALE: 1:1			
A	06−May−2019	(PC0001)	Ken	APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO:	WFSV635−XX−V0	
REV	DATE	FILE	BY		PROJECTION:			

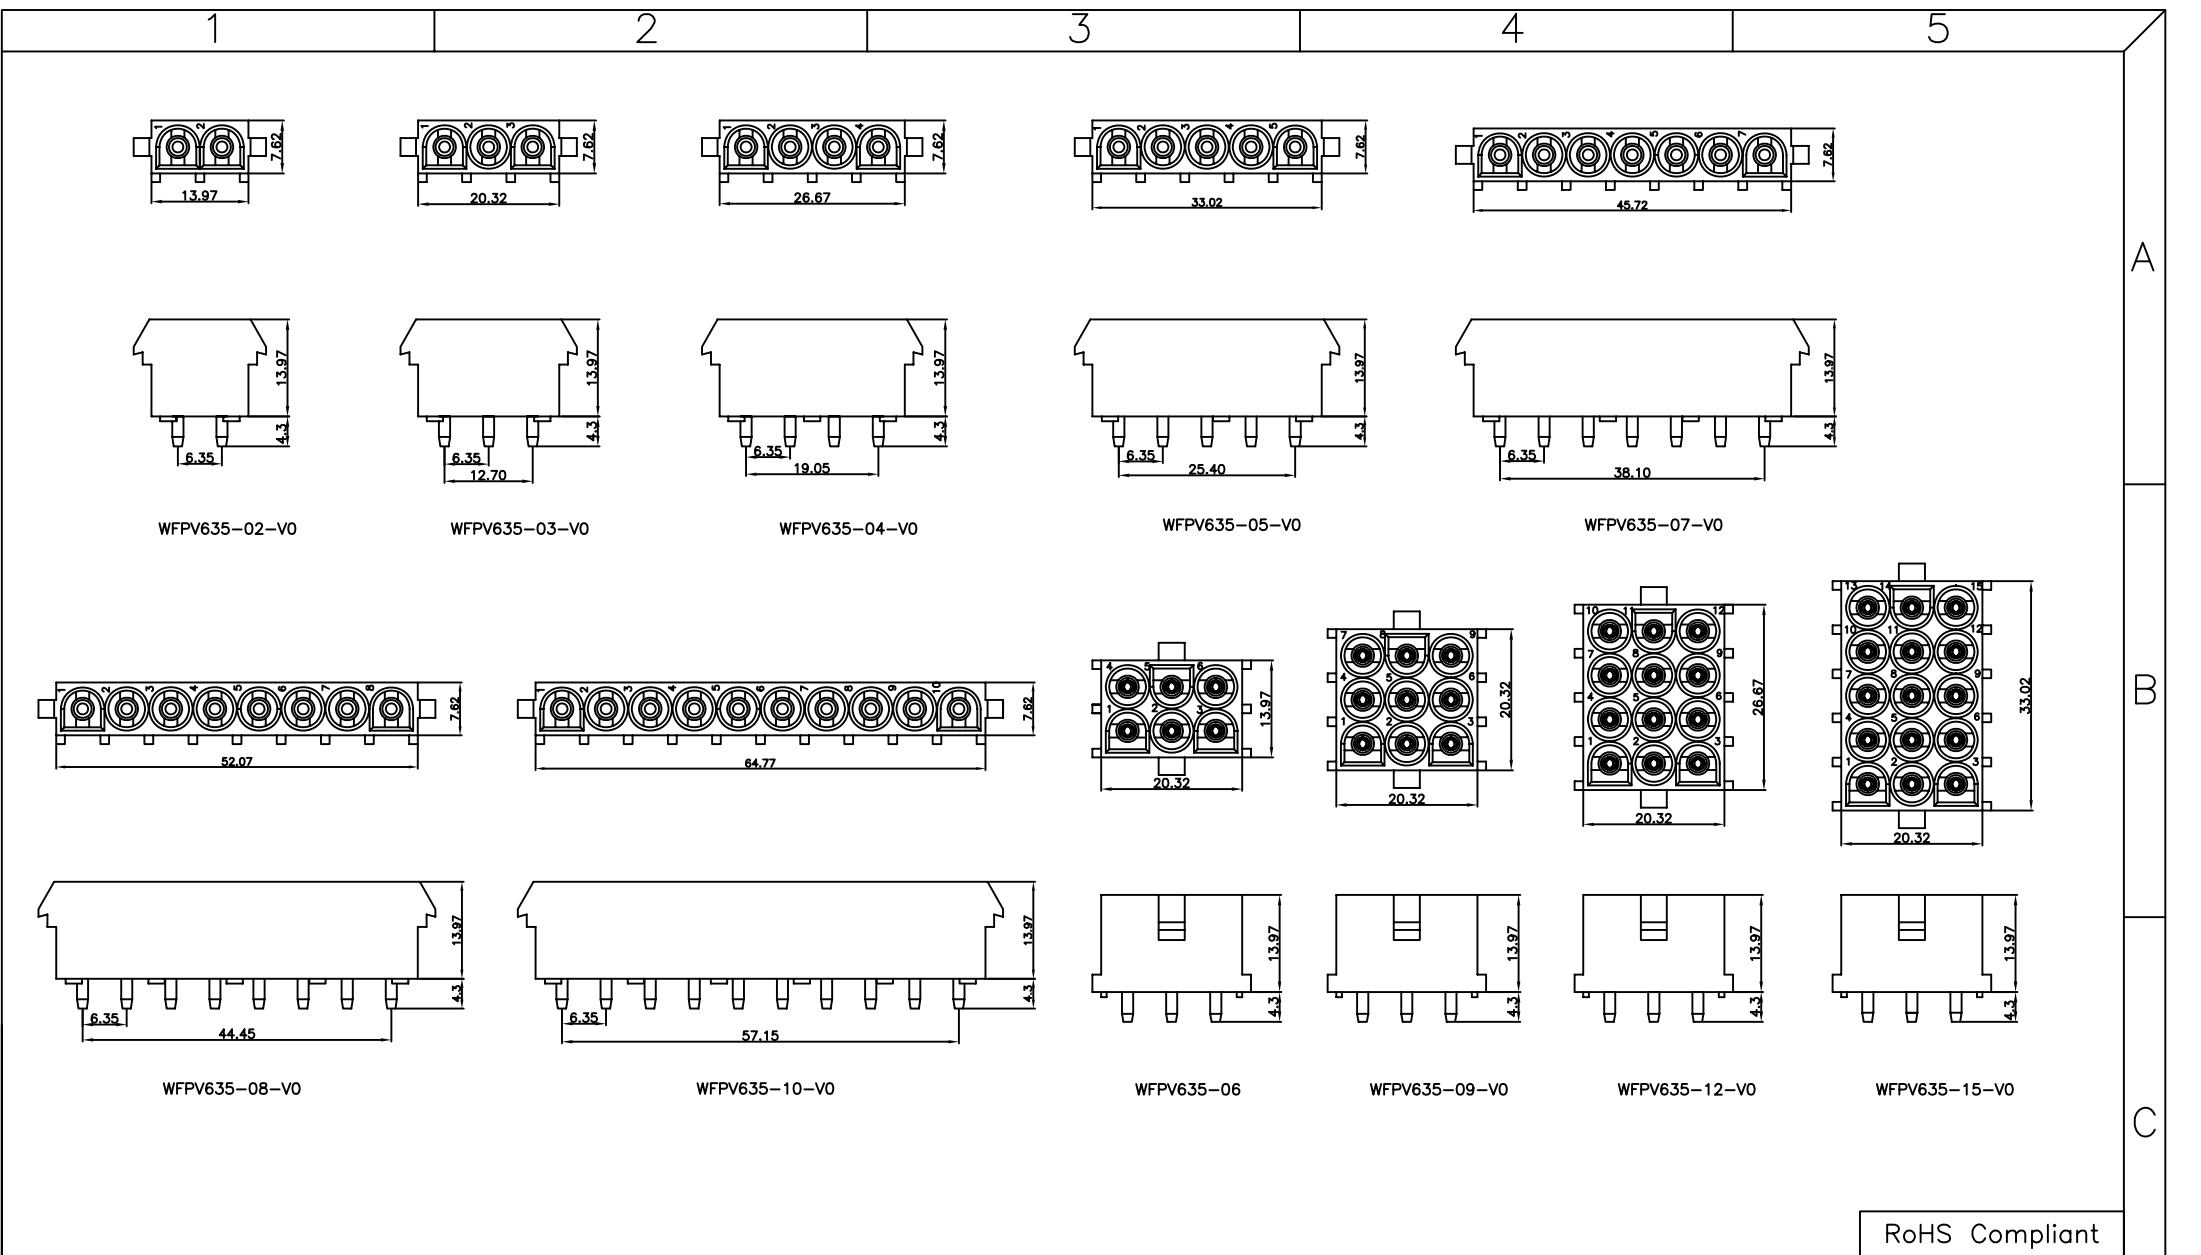

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 6.35mm Power Wafer Straight Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 2 / 2	PART NO: WFPV635-XX-V0	
A	22-May-2014	(PC0001)	Ken		PROJECTION: 		
REV	DATE	FILE	BY				