




1

2

3

4

5

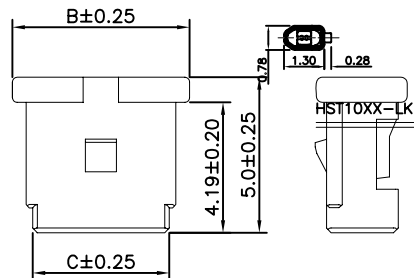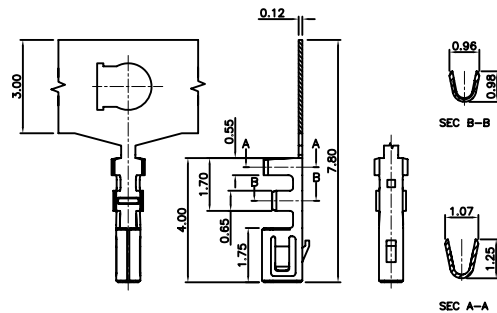

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:50V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:100M ohm. Min.

Withstanding Voltage:500V AC/Minute

Operating Temperature Range:-25°C~+105°C

Applicable Wire:Awg28~32#

Material and Finish

Insulator:Nylon 66 UL94V-0

Color:Black


Contact:Phosphor Bronze

Plating:Tin Plated

How To Order

HMX10-XX

No. Of Positions



Pin.	Dimensions(mm)		
	A	B	C
2P	1.00	3.70	2.40
3P	2.00	4.70	3.40
4P	3.00	5.70	4.40
5P	4.00	6.70	5.40

RoHS Compliant



DRAWN:

Ken

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

CHECKED:

Lily Chou

UNIT: MM

SCALE: 1:1

DESCRIPTION:

1.0mm Female Housing & Terminal

SIZE

APPROVAL:

Chao Peng

SHEET: 1 / 2

PART NO:

HMX10-XX &HST10XX

A4


REV

DATE

FILE

BY

PROJECTION:



E

D

C

B

A

A

B

C

D