
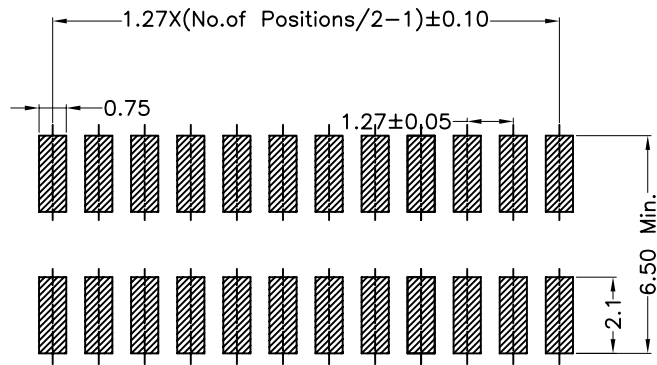

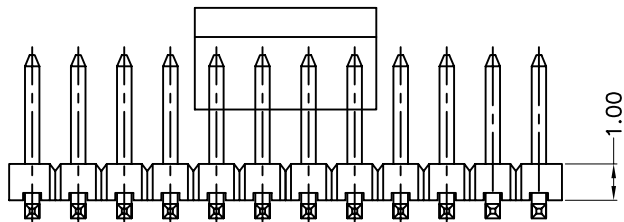
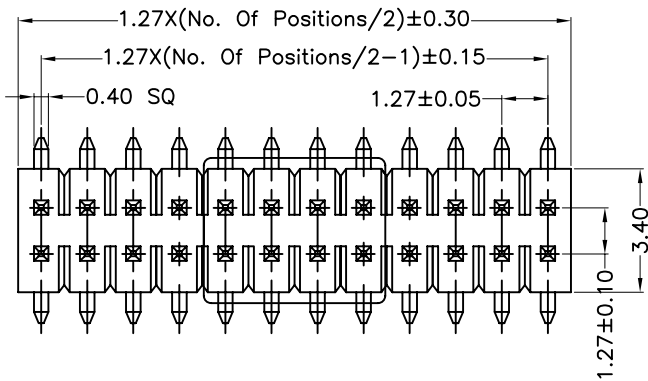




PCB Layout

Specifications:
Current Rating:1.0 Amps
Voltage Rating:50V AC/DC
Contact Resistance:20mohm max.
Insulation Resistance:1,000M ohm min.
Withstanding Voltage:500V For One Minute
Operating Temperature:-25°C ~ +105°C
Material
Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
Standard Color:Black
Contact:Copper Alloy
Plating:Gold Plated
How To Order
PHDSM127-XXG-3015CR
CR:Cap+Tape & Reel
Length
G:Gold Plated
No. of Positions
Double Rows SMT Type

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 1.27mm Pin Header SMT Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: PHDSM127-XXG-3015ACR	
A	24-June-2026	(PC0001)	Ken		PROJECTION: 		
REV	DATE	FILE	BY				