
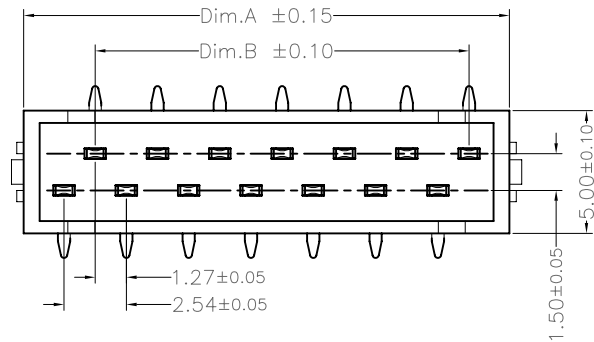


SECTION A-A

Dimension:

POSITIONS	Dimension:		POSITIONS	Dimension:	
	A	B		A	B
04	7.10	2.54	16	22.34	17.78
06	9.64	5.08	18	24.88	20.32
08	12.18	7.62	20	27.42	22.86
10	14.72	10.16	22	29.96	25.40
12	17.26	12.70	24	32.50	27.94
14	19.80	15.24	26	35.04	30.48



Specifications:


Current rating:1.0A AC,DC
Voltage rating:30V AC,DC
Contact tesistance:20m ohm Max
Insulation resistance:1000M ohm Min
Withstanding voltage:500V AC for one minute
Operating Temperature:-40°C ~ +105°C

Materials:


Insulator:High Temp Plastic(Nylon46 UL94V-0)
Insulator Color:Red
Contact:Copper
Plated:Tin Plated

How to Order
WFAPSM254-XX

No.Of Positions
SMD Type

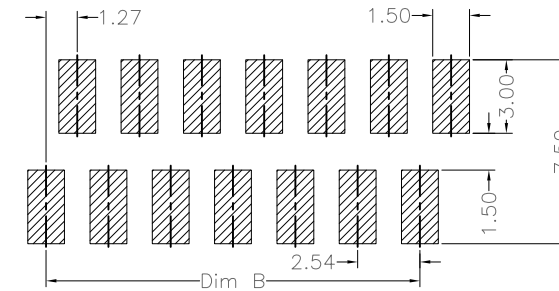

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 HOYATO Connector supplies		
E								
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm PCB Connector A Plug SMT Type	SIZE A4	
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: WFAPSM254-XX		
A	12-Aug-2017	(PC0001)	Ken		PROJECTION: 			
REV	DATE	FILE	BY					