



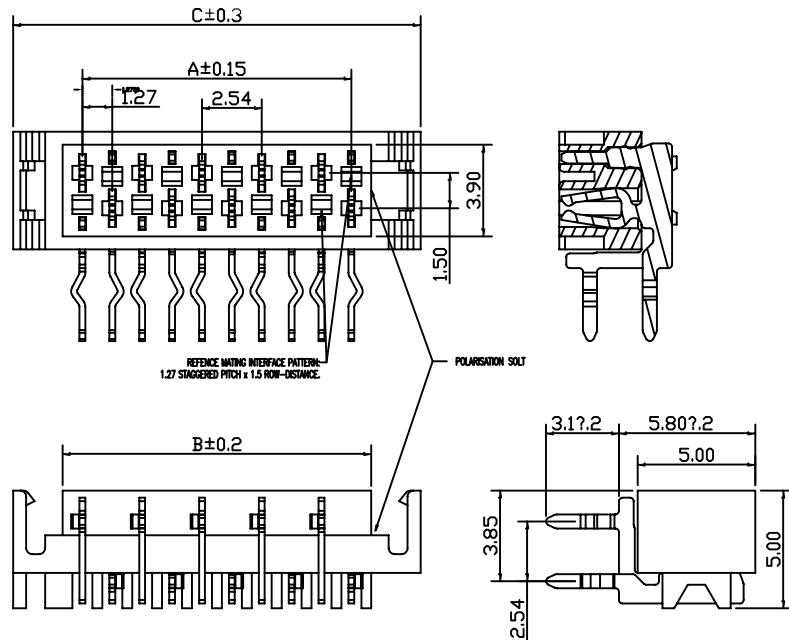

NUMBER OF POSITIONS	DIMENSION			Q'ty /Tube	NUMBER OF POSITIONS	DIMENSION			Q'ty /Tube
	A	B	C			A	B	C	
04	3.81	5.50	9.71	59	16	19.05	20.74	24.95	23
06	6.35	8.04	12.25	47	18	21.59	23.28	27.49	21
08	8.89	10.58	14.79	39	20	24.13	25.82	30.03	19
10	11.43	13.12	17.33	33	22	26.67	28.36	32.57	17
12	13.97	15.66	19.87	29	24	29.21	30.90	35.11	16
14	16.51	18.20	22.41	25	26	31.75	33.44	37.65	15



Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m Ohm. Max.
 Insulation Resistance:1000M Ohm. Min.
 Withstanding Voltage:AC 500V AC/Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material And Finish
 Insulator:High Temp. Plastic(Nylon 46 UL94V-0)
 Insulator Color:Red
 Contact Material:Copper Alloy
 Finish:Tin Plated


How To Order

WFAR254-XX-LK

With Lock

No.Of Positions

R/A Type

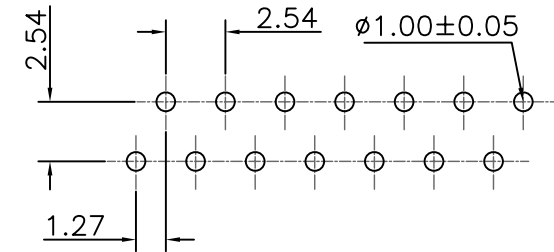

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15			SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm PCB Connector R/A Dip Type		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: WFAR254-XX-LK		
A	12-Aug-2018	(PC0001)	Ken		PROJECTION: 			
REV	DATE	FILE	BY					