


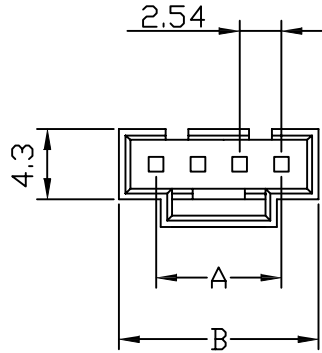




2 CIRCUIT

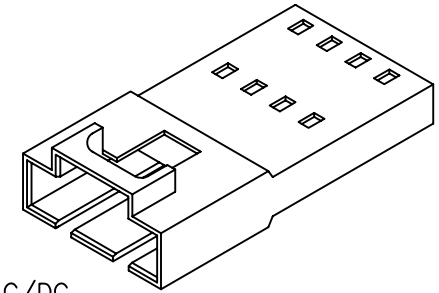

3 CIRCUIT



Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:15m ohm. max.

Insulation Resistance:1000M ohm. Min.

Withstanding voltage:600V AC For One Minute

Operating Temperature Range:-25°C to +105°C

Material and Finish

Insulator:PBT UL94V-0

Mating:HPCT254T



Dimension:

Circuits	Dimension:	
	A	B
02	2.54	7.10
03	5.08	9.70
04	7.62	12.20
05	10.16	14.70
06	12.70	17.30
07	15.24	19.80
08	17.78	22.40
09	20.32	24.90
10	22.86	27.40
11	22.86	30.00
12	22.86	32.50


How To Order

HPC254-XX

No. of Positions

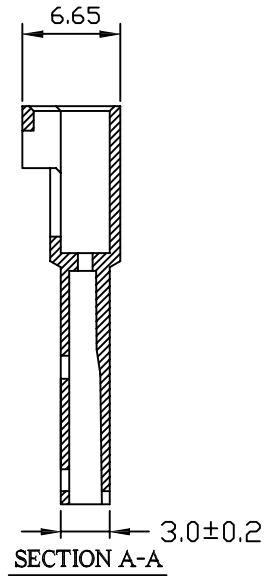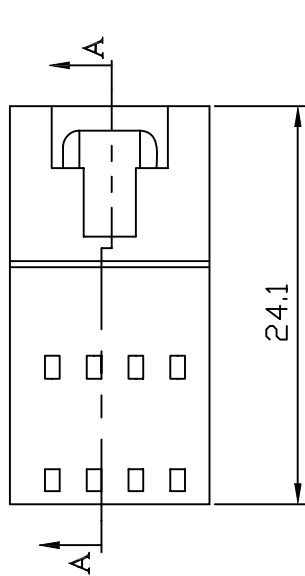

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15			
E								
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.54mm Male Housing	SIZE A4	
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: HPC254-XX		
A	01-SEP-2009	(H0050)	Ken		PROJECTION: 			
REV	DATE	FILE	BY					