

Specifications:

Current Rating:2.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm max.
 Insulation Resistance:1000M ohm min.
 Withstanding Voltage:500V AC/minute
 Temperature Rating:-40°C ~ +105°C


Materials:

Insulator:High Temp Plastic (Nylon 6T UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated

How To Order

PHV20-XXX-820H15

Plastic Height 1.5mm
 Length
 G:Gold Plated
 T:Tin Plated
 SG:Selective Gold Plated
 No.of Positions
 Straight Type

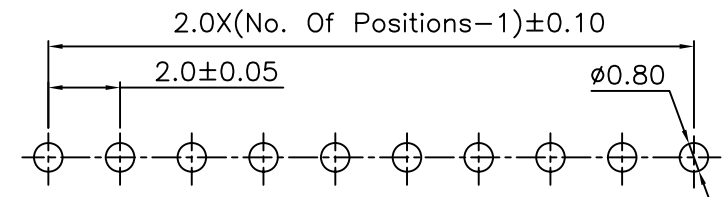

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.0mm Pin Header Single Row Straight Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHV20-XXX-820H15		
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					